

10/16/00

3957 U.S. PTO

Please type a plus sign (+) inside this box →

+

PTO/SB/05 (08-00)
 Approved for use through 10/31/2002. OMB 0691-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

09/91/01
 98989/60
 06 5 11 6180-1

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Attorney Docket No. 86165.00030

First Inventor Restive, Mario J.

Title ASPIRATION SPRAYER

Express Mail Label No. EL603844550US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
 (Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.
 See 37 CFR 1.27.
3. ☒ Specification [Total Pages 14]
 (preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of Disclosure

4. ☒ Drawing(s) (as USC 119) [Total Sheets 11]

5. Oath or Declaration [Total Pages 2]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. 1.63(d))
 (for continuation/divisional with Box 17 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
 Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. 1.63(c)(2) and 1.33(b).

6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:

Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 C.F.R. 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS) PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
 (Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)
 (if foreign priority is claimed)
16. ☐ Other: _____

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____
 Prior application Information: _____ Examiner: _____ Group/Art Unit: _____

For **CONTINUATION** or **DIVISIONAL APPS** only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number of Bar Code Label



or ☐ Correspondence address below

Name _____
 Address _____
 City _____ State _____ Zip Code _____
 Country _____ Telephone _____ Fax _____

Name (Print/Type)	Brian B. Shaw	Registration No. (Attorney/Agent)	33,782
Signature		Date	October 16, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FREE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT \$501

Complete if Known

Application Number
Filing Date
First Named Inventor **Restive, Mario J.**
Examiner Name
Group Art Unit
Attorney Docket Number **86165.000030**

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayment to:

Deposit
Account Number **033875**

Deposit
Account Name **HARTER, SECREST & EMERY LLP**

- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

☐ Applicant claims small entity status. See 37 CFR 1.27

2. ☒ **Payment Enclosed:**

☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Fee Code	Entity (\$)	Small Fee Code	Entity (\$)	Description	Fee Paid
101	690	201	345	Utility filing fee	\$345.00
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	690	208	345	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) \$345.00

2. EXTRA CLAIM FEES

	Extra claims	Fee from below	Fee Paid
Total Claims	12	20** = 0	X 9 = \$0
Independent Claims	7	4	39 = \$156

Multiple Dependent

**or number previously paid, if greater, For Reissues, see below

Large Fee Code	Entity (\$)	Small Fee Code	Entity (\$)	Description
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim, if not paid
109	78	209	39	** Reissue independent claim over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) \$156

FEE CALCULATION (check one)

3. ADDITIONAL FEES

Large Fee Code	Entity (\$)	Small Fee Code	Entity (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	670	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))	
179	690	279	345	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify)

SUBTOTAL (3) (\$)

* Reduced by Basic Filing Fee Paid

SUBMITTED BY

Name (Print/Type) **Brian B. Shaw**

Registration No. (Attorney/Agent)

33,782

Complete (if applicable)

Telephone **716-232-8500**

Signature

Date **October 16, 2000**

Under the Paperwork reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Approved for use through 09/30/20/00. OMB 0651-0031
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

STATEMENT CLAIMING SMALL ENTITY STATUS (37 C.F.R. 1.9(f) & 1.27 (b))—SMALL BUSINESS CONCERN

Docket Number (optional)
86165.000030

Applicant, Patentee or Identifier: Restive, Mario J.

Application or Patent No. _____

Filed or Issued: _____

Title: ASPIRATION SPRAYER

I hereby state I am

- ☐ the owner of the small business concern identified below:
☒ the official of the small business concern empowered to act on behalf of the concern identified below

NAME OF SMALL BUSINESS CONCERN The Fountainhead Group, Inc.

ADDRESS OF SMALL BUSINESS CONCERN 23 Garden Street, New York Mills, New York, 13417

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING John Romano

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING 23 Garden Street, New York Mills, New York 13417

SIGNATURE 

DATE 10-11-00

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, D.C. 20231.

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 C.F.R. 1.9(f) & 1.27 (b))—INDEPENDENT INVENTOR

Docket Number
86165.000030

Applicant, Patentee or
Identifier: Restive, Mario J.

Application or Patent
No.

Filed or Issued:

Title: ASPIRATION SPRAYER

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed, and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.
☒ Each such person, concern or organization is listed below.

Name	<u>The Fountainhead Group, Inc.</u>	Name	_____
Address	<u>23 Garden Street</u>	Address	_____
City	<u>New York Mills</u>	City	_____
State	<u>New York</u> ZIP <u>13417</u>	State	_____ ZIP _____
Country	<u>UNITED STATES</u>	Country	_____

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

Restive, Mario J.



Signature of inventor

Signature of inventor

Signature of inventor

10-10-2000

Date

Date

Date

ASPIRATION SPRAYER

Field of the Invention

The invention relates generally to mixing and dispensing sprayers and more particularly to aspiration type sprayers for use in dispensing a liquid based
5 chemical from a valved container into a carrier fluid.

Background of the Invention

Every year thousands of gallons of chemicals such as fertilizers or pesticides are applied to crops, plants, lawns, flowers, vegetable gardens and other organic type vegetation. Such chemicals are often sold to the consumer in the
10 form of a concentrated liquid, and therefore are extremely hazardous to the consumer end user and environment in general. Accordingly, these concentrated liquids are marketed in sealed valved containers.

However, the need exists for a sprayer that can cooperatively engage the container and entrain the chemicals or solution from the container for dispersion.
15 The need also exists for a sprayer that can employ relatively low flow rates to access and disperse the chemicals from the container.

Summary of the Invention

The present invention provides a low-flow rate aspirator type sprayer, configured to be removably interlocked with a single-use pre-filled container.
20 The container includes a valve for selectively permitting passage of material from the container. The sprayer is connected to a source of a carrier fluid such as a tank sprayer. A specific configuration of the present invention provides sufficient aspiration at relatively low flow rates to access the material in the container and entrain the material for dispersion.

25 The sprayer includes a housing, which encloses a passageway having a venturi. The passageway is fluidly connected to a plunger which is moveably connected to the housing between a retracted position and an actuating position.

The plunger has a duct there through to provide a path for material from the container to pass to the passageway.

When purchased by the user, the container is sealed by a valving mechanism which is held in a closed position by a bias mechanism, such as a spring. The valving mechanism provides an exit from the container when properly actuated. A dip tube extends from the valving mechanism and is sized to be immersed in the additive until the additive is depleted.

A superstructure of the container has a flange which can interlock with the sprayer housing. With the sprayer and the container interlocked together, the plunger is aligned with the valving mechanism. When water is caused to flow through the passageway and the venturi, a resulting high pressure is created upstream of the venturi constriction, this relatively high pressure is exposed to the plunger to urge the plunger against the valving mechanism to open a flow path from the container to the venturi. The water flow also produces a reduced pressure at the constriction of the venturi which allows an atmospheric pressure acting on the additive in the container to push the additive through the dip tube and into the flow passing through the passageway.

That is, once the plunger is actuated, the pressure differential between the reduced pressure in the venturi and the atmospheric pressure acting on the material (additive) in the container causes the additive to be pushed up through the dip tube, the valving mechanism and the plunger until it enters the stream of carrier liquid in the venturi. This upward flow of additive is driven by the atmospheric pressure above the additive, which is greater than the pressure at the point where the additive exits into the venturi.

The concentrate additive enters the low-pressure area of the venturi and mixes with the water as it flows into the diverging section of the venturi, extension and nozzle tip. At the venturi divergence, the high pressure is restored and is applied through the extension to the nozzle tip. This high pressure at the tip

allows for the ability to increase the velocity at the nozzle and provide the shear stresses needed to form droplets in a spray pattern.

- The invention, then, provides that the pressure required for the plunger to actuate the valving mechanism of the container is supplied by a relatively high pressure in the flow of carrier fluid resulting from the flow of the carrier fluid through the venturi, eliminating the necessity for a mechanical device to be incorporated into the nozzle.

Brief Description of the Drawings

- Figure 1 is a schematic of a spraying apparatus.
- 10 Figure 2 shows in cross-section a spray assembly in a non-operative position, including a spray nozzle and a container.
- Figure 3 shows a close-up of a portion of Figure 2.
- Figure 4 shows the spray nozzle in cross-section, in an operative position.
- Figure 5 shows a venturi in cross-section.
- 15 Figure 6 is a top plan view of a plunger.
- Figure 7 is a cross section of the plunger taken along line 7-7 of figure 6.
- Figure 8 is a perspective view of a portion of the plunger
- Figure 9 is a perspective view of a check valve.
- Figure 10 is a plan view of a flexible seal.
- 20 Figure 11 is a cross-section of the flexible seal taken along line 10-10.
- Figure 12 is a cross-section of a portion of a reconfigured venturi from a second embodiment of the spray nozzle.
- Figure 13 is a cross-section showing a reconfigured plunger engaged with the venturi of Figure 12.

25 Detailed Description of the Invention

Referring to the drawings, a spraying apparatus 10 shown schematically in Figure 1 includes a fluid source 20 and a sprayer assembly 30. The spraying

apparatus 10 cooperates with a chemical container 50 to withdraw and disperse an additive (chemical) 58 from the container 50.

The fluid source 20 is typically a tank which can be pressurized by hand, and also includes flexible hose 22 with a shutoff 24, and a first connector fitting 26. However, it is understood the fluid source 20 may be any of a variety of structures including pack back tanks, hand portable tanks or even tractor transported tanks.

In the preferred embodiment, the sprayer assembly 30 shown in Figure 2 cooperates the container 50 which has a neck 51 enclosed by a superstructure 52. The container 50 includes an interlock portion 54. The container 50 holds an additive (chemical) 58 which, when the sprayer assembly 30 is functioning, is drawn into a fluid stream in the spray nozzle 40 to be diluted to a predetermined degree and sprayed on a selected surface.

The sprayer assembly 30 includes a nozzle 40, having a housing 42 and an interlock flange 44 which releasably engages with the interlock portion 54. A second connector fitting 56 couples with the first connector fitting 26 to provide a fluid-tight joint between the source 20 and the spray nozzle 40.

An important feature of the sprayer assembly 30 is a passageway 62 including a venturi 60, viewed in the cross-section of Figures 4 and 5. A wide entry 64 and a first tapered region 66 lead to a constriction 68, and a second expanding tapered region 70 terminates at an exit 72 which has a similar diameter to the entry portion 64. Each of the tapered regions 66 and 70 has respectively a steeply tapering portion 74 and 76, a less steeply tapering portion 78 and 80, and a corresponding transitional portion 82 and 84 between them. The exact profile of the venturi 60 is determined by the quantitative fluid flow and pressure requirements. Qualitatively, the general characteristics of the venturi 60 provide that fluid which enters at a certain rate must increase its flow velocity as it passes through the constriction 68 and decrease its flow velocity as the passageway 62

widens again. The fluid pressure must correspondingly fall as the flow passes through the constriction 68 and increases again downstream of the constriction. That is, the flow is governed by Bernoulli's equation which states that along a flow line, the static pressure plus dynamic pressure remain constant.

5 The housing 42 has a depending boss 100, providing an open-ended channel 102 which communicates with the passageway 62, and has a diameter comparable with that of the constriction 68. Concentric with the boss 100 is a skirt 104 which depends from the body of the housing 42, extending approximately the same distance as the boss 100.

10 A space 106 between the protuberance 100 and skirt 104 accommodates an actuator or plunger 110, which has a generally cylindrical shape and includes an open-ended axial channel 112, as seen in Figures 6 and 7. The plunger is movable between a retracted position and an actuating position. An upper portion 114 of the plunger 110 has a cylindrical cavity 116 and is sized so that it can
15 slidably engage the housing 42 intermediate the boss 100 and the skirt 104. At the lowest part of the cavity 116 is a seat 118 wherein is located a check valve 130 illustrated in Figure 9. The check valve 130 has the form of a ring 132 having an aperture 134 and a hinged flapper portion 136. The check valve 130 is biased to a default open position, to permit flow from the sprayer assembly 30 to the
20 container 50.

A lower portion 120 of the plunger 110 has vertical strengthening ribs 122 spaced around its perimeter. Also provided on the lower portion has a stop 126 which limits downward travel of the plunger 110 when it contacts the interior surface of the housing 42, and ensures that the upper portion 114 of the plunger
25 110 remains intermediate and engaged with the boss 100 and the skirt 104.

A conduit 86 extends from an entry point 88, at a relatively high pressure region of the venturi 60, to an exit point 90 which is inside the space 106, and diverts some of the incoming fluid thereto. In effect, the conduit 86 allows the

fluid pressure at the entry point 88 to be transmitted to the plunger 110. The application of this pressure on the plunger 110 urges it downward to actuate the valving of the container 50 in a manner which will become clear. In an alternative configuration, a flexible seal 92 is located to inhibit migration of fluid beyond the
5 plunger 110..

The seal 92 has a generally circular shape when viewed from above, as seen in Figure 10. When viewed in profile, the seal 92 exhibits a cross-section having the double-cup shape of Figure 11. A smaller, inverted portion 94 of the seal 92 is sized to be received by a recess 96 which is provided at the upper end of
10 the plunger 110, as best seen in Figures 7 and 8. In profile, the recess 96 becomes wider as its depth increases, allowing the inverted portion 94 of the seal 92 to be securely engaged therein. An upper portion 98 of the seal 92, when not constrained has an outer circumference slightly greater than the inside circumference of the skirt 104, and an inner circumference slightly smaller than
15 the outer circumference of the protuberance 100. Both the outer and inner circumferences of the seal 92 are in constant contact with the corresponding surfaces of the venturi 60, and the passage of fluid is precluded thereat, while the plunger 110 remains free to be moved up and down between the retracted position and the actuating position.

Referring to Figure 2, a carrier fluid input tube 140 passes through the housing 42 and is inserted into the entry portion of the venturi 60, being sealed therein using an O-ring 142. Outside the housing, 42, the input tube 140 terminates at the second connector fitting 56, which couples with the first connector fitting 26 as previously indicated. Similarly, an output tube 144 is
20 sealed in the exit portion 72 using a second o-ring 146. The output tube 144 passes through the housing, beyond which it extends some appropriate distance and terminates at a nozzle tip 148, which can be chosen according to the pattern of spray desired.

Prior to the sprayer 30 being attached to the container 50, the container contents are sealed therein by a valving assembly 160 which is enclosed by a collar 53 of the superstructure 52. As best seen in Figure 3, the valving assembly 160 extends downward into the container 50 through the neck 51, and is
5 threadedly joined thereto through an intermediate structure 55. When the sprayer assembly 30 is attached to the container 50, the plunger 110 is brought into contact with a movable member 161 of the valving assembly 160 against the opposition of a spring 162. It is not necessary for the purposes of this application to provide a detailed description of the valving assembly 160; however, it is
10 pertinent to indicate that the valving assembly 160 has an outlet valve 164 which is seated in an orifice 166 of an additive inlet tube 168 and acts as a gate. It is displaced upward by additive as it enters through a dip-tube 170 from the container 50, but any back flow is precluded since the concomitant downward pressure would immediately cause the outlet valve 164 to be re-seated in the
15 orifice 166 to provide a seal.

The spray assembly 30 is attached to a carrier fluid source which provides a low flow rate of water, typically in the range up to about 1.5 gallons per minute (approximately 6 litres per minute). In one configuration, the source 20 is a tank sprayer which can be pumped by hand to provide an internal pressure to eject the
20 water, although a garden hose could also be used if a suitable flow limiter were employed.

Operation

To prepare the assembly for use, the container 50 containing additive is locked in position on the sprayer 30, bringing the plunger 110 into contact with
25 the valving assembly 160. In the absence of any further pressure, the opposing force of the spring 162 ensures that the plunger 110 remains in its uppermost, retracted, position. At this point, the sprayer assembly 30 has the configuration

shown in Figure 4, with the plunger stop 126 elevated above the interior surface of the housing 42.

A shutoff 24 at the source 20 is turned on to allow the flow of carrier liquid, water, to commence. As the water passes through the venturi 60, the water from the conduit 86 exerts a relatively high pressure on the upper surface of the plunger 110. The water being at a relatively high pressure corresponding to the position in the venturi 60 where the conduit has its entry point 88, there is sufficient pressure to overcome the opposition of the spring 162 and causes the plunger 110 and the movable member 161 of the valving assembly 160 to be downwardly displaced together to the actuating position, thereby unsealing the container 50 so that additive 58 can exit. The plunger 110 is now in the position illustrated in Figure 4, the stop 126 being in contact with the interior of the housing 42, which limits further downward travel.

Meanwhile, the water flowing past the constriction 68 has a lower pressure than the interior of the container 50, providing a driving force for the additive 58 to be expelled therefrom. The pressure drop between the container 50 and the area of the constriction 68 causes the outlet valve 164 and the check valve 130 to open, and additive 58 is drawn up through the dip tube 170 and into the venturi 60, wherein it enters the carrier liquid (water) stream and is mixed with the water downstream from the constriction 68. The proportion of additive to water is determined by characteristics of the venturi 60 in a manner which is well known in the art and which is not the subject of this invention.

When no further spraying is required, the shut-off 24 at the source is closed to stop the flow of water through the passageway and venturi. The upward force of the spring 162 is now sufficient to return the movable member 161 and the plunger 110 to their uppermost positions. The outlet valve 164 and the check valve 130 close, and entry of residual water from the venturi 60 into the container 50 is precluded. If the contents of the container 50 are exhausted or are no longer

currently required, the container 50 can be separated from the spray nozzle 40, and replaced if desired by another container which has either the same or a different additive.

In the foregoing preferred embodiment, a positive pressure is
5 communicated from a relatively high-pressure region of the venturi to a portion of the plunger 110, which is thus urged downward to the actuating position. In another embodiment shown in Figures 12 and 13, a reconfigured plunger 180 is actuated by a negative pressure communicated from a low-pressure region of a reconfigured venturi 180, shown in Figure 12. A conduit 192 is provided in the
10 venturi 190 between a low-pressure point 194 and a point 196 at which it meets a part of the space 106 between the protuberance 100 and the skirt 104. A vent 198 passes through the skirt near the top of the space 106. A second seal is also provided on the bottom of the plunger 180.

Figure 13 shows the reconfigured plunger 180 slidingly engaged with the
15 venturi 190 in the space 106. The plunger 180 has a sliding portion 182 which is joined to the lower portion 120 by a narrower stem portion 184. The flexible seal 92 is secured to the sliding portion 182 in the same manner as it is attached to the plunger 110 of the first embodiment. The plunger 180 can travel up and down within the space 106 such that the upper and lower limits of travel are between the
20 conduit point 196 and the vent 198.

When the spray nozzle is activated, a low pressure is established at point 194 and transmitted through the conduit 192 to the portion of the space 106 which is below the sliding portion 182. The presence of the vent 198 maintains the
25 portion of space 106 which is above the sliding portion 182 at atmospheric pressure. The resulting pressure difference urges the plunger 180 downward.

The spraying apparatus 10 of the invention has several advantages compared with other low-flow spraying systems. In other spraying systems, additives must frequently be diluted by hand, with the possibility of spills,

mistakes and miscalculations. Other tank spraying systems require a mixed additive-water solution to be present in the tank, whereas in the present invention, the tank need contain only water. Rinsing out a tank between uses of different chemicals is much more laborious than the trivial task of purging a small remnant
5 of solution from a spray nozzle. Furthermore, the spray nozzle of the present invention does not require its own shutoff, since flow of additive commences as a result of the pressure differences in the sprayer assembly 30 which only exist when water flows through the venturi. Spraying is simply initiated by operating a shutoff 24 which is already present at the source 20. The absence of an on-off
10 control in the spray nozzle 40 renders it more simple and economical to manufacture.

While the invention has been described in connection with certain embodiments, it is not intended to limit the scope of the invention to the particular form set forth, but on the contrary, it is intended to cover such alternatives,
15 modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

In the Claims:

1. A sprayer for releasably engaging a container of liquid, the container including an outlet valve, the sprayer comprising:
 - (a) a venturi; and
 - (b) a plunger fluidly connected to the venturi and movable between a closed position and an activating position in response to a flow through the venturi.
2. The sprayer of Claim 1, wherein a resistance to flow by the venturi creates a positive pressure before the venturi which exerts a positive pressure on the plunger..
3. The sprayer of Claim 1, wherein the plunger is fluidly connected to the venturi to expose a negative pressure to the plunger in response to a flow through the venturi.
4. A sprayer assembly connectable to a container having an actuable outlet valve, comprising:
 - (a) a venturi; and
 - (b) an actuator connected to the venturi to actuate the outlet valve in response to a flow through the venturi.
5. The sprayer of Claim 4, further comprising a flow path fluidly connecting a low pressure area in the venturi to an interior of the container.
6. A sprayer assembly for releasably engaging an additive source having an outlet valve, the assembly comprising:
 - (a) a housing having a venturi, the housing configured to releasably engage a source of pressurized carrier liquid for generating a flow through the venturi; and

(b) an actuator moveably connected to the housing between an actuating position and a closed position.

7. The sprayer assembly of Claim 5, wherein the actuator is fluidly connected to the venturi and moveable to the actuating position in response to a flow through the venturi.

8. A low flow sprayer assembly for engaging an additive source, comprising: (a) a housing having a venturi configured to generate sufficiently reduced pressure to entrain an additive at a flow rate less than 1.5 gpm through the venturi; and (b) a plunger moveably connected to the housing between a first position and a second position in response to a flow through the venturi.

9. A sprayer assembly, comprising:

(a) a venturi;

(b) a plunger fluidly connected to the venturi and moveable between an open position and a closed position, the plunger including a passageway therethrough; and

(c) a check valve fluidly connected to the passageway in the plunger.

10. A method of withdrawing liquid from a container, comprising:

(a) passing a fluid through a venturi to create a localized low pressure zone and a localized high pressure zone; and

(b) exposing a plunger to the low pressure zone or the high pressure zone to move the plunger to an activating position for withdrawing liquid from the container.

11. The method of Claim 9, further comprising employing a remaining one of the low pressure zone and the high pressure zone to urge the liquid from the container.


12. A method of spraying, comprising:


- (a) connecting a sprayer assembly having a venturi to a hand operated pump;
- (b) actuating a valve connected to an additive source in response to a flow through the venturi; and
- (c) entraining additive from the additive source in the flow through the venturi.

ABSTRACT OF THE DISCLOSURE

- 10 A low-flow-rate sprayer assembly is provided, wherein additive from a container is entrained in a stream of carrier fluid passing through a venturi. The pressures created by flow through the venturi actuate a release valve on the container and entrain the additive in the carrier fluid.

FIG. 1.

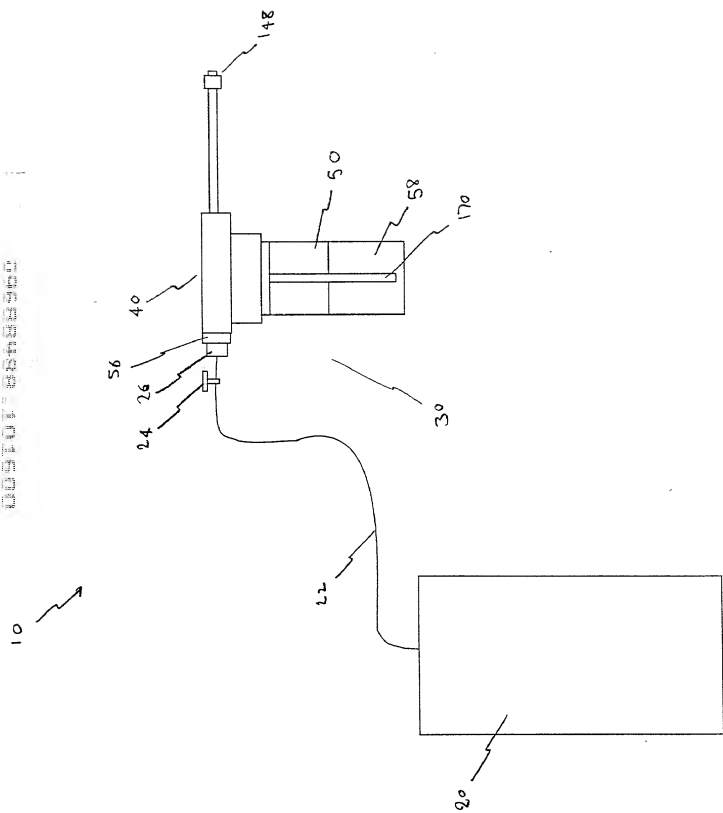

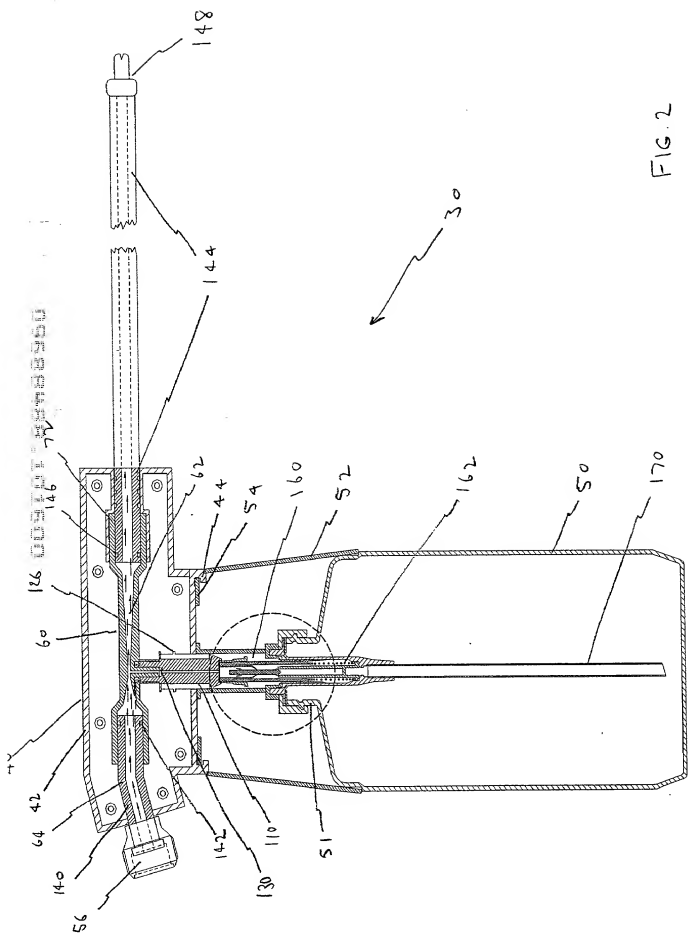

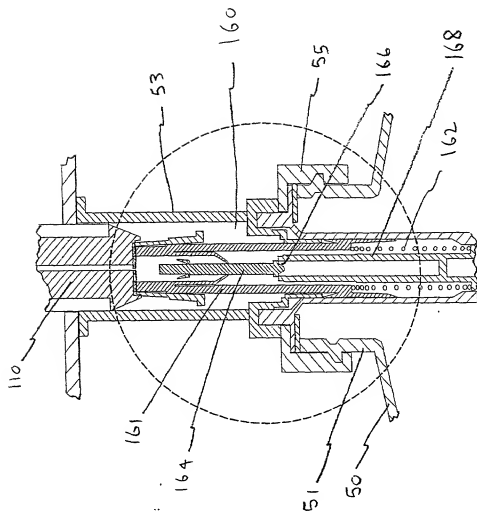
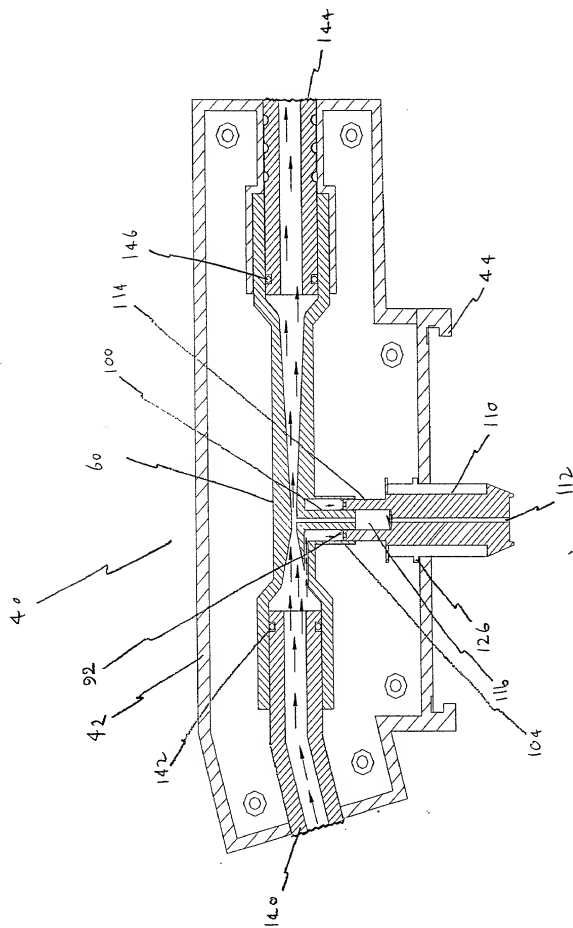


FIG. 3

FIG. 4



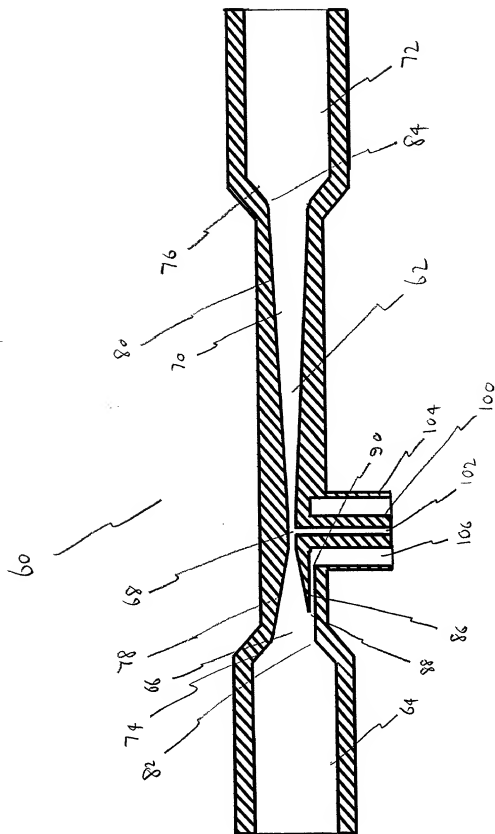


FIG. 7

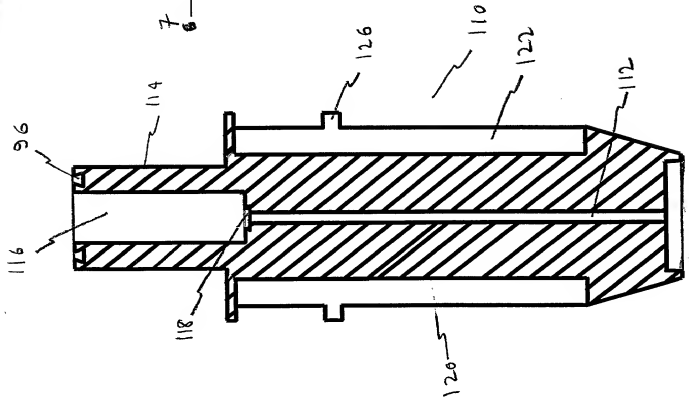


FIG. 6

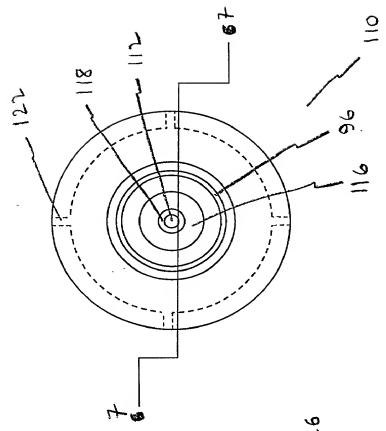


FIG. 8

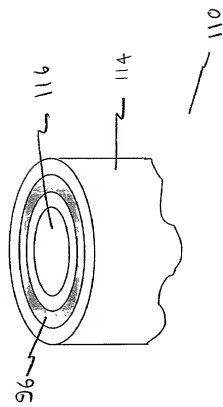


FIG. 9

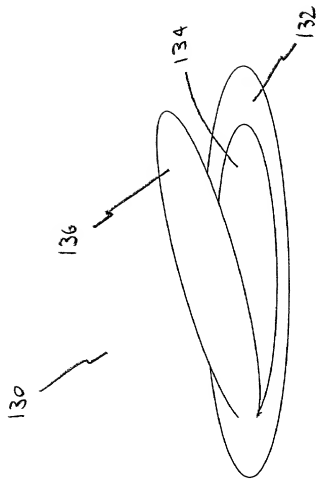


FIG. 10



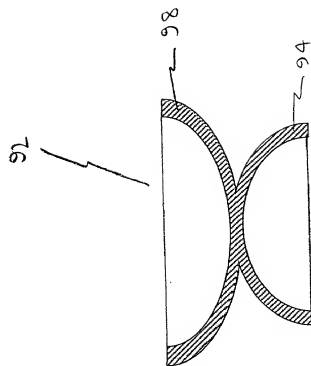


FIG. 11

FIG. 12

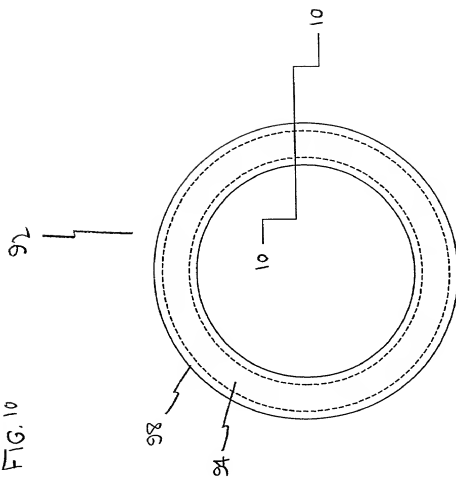

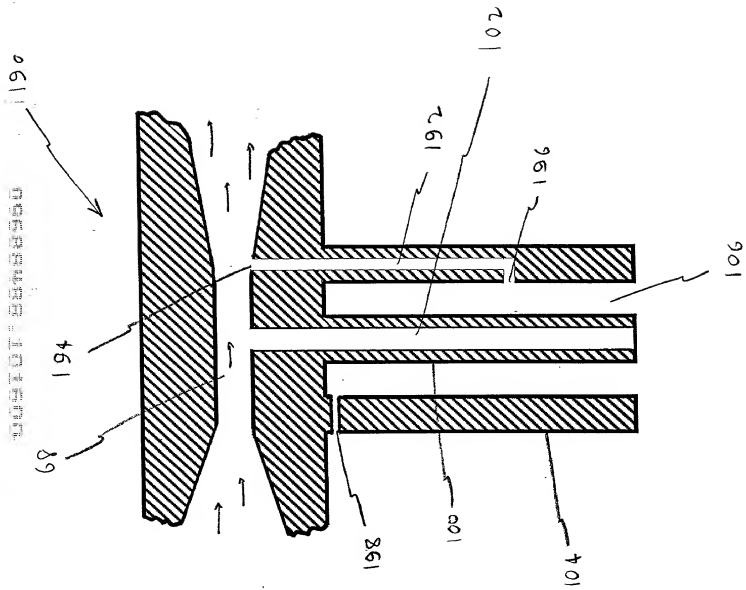

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

Declaration
Submitted with
Initial FilingDeclaration Submitted
after Initial Filing
(surcharge (37 CFR 1.16 (e))
required)

Attorney Docket Number 86165.000030

First Named Inventor Restive, Mario J.

COMPLETE IF KNOWN

Application Number

Filing Date

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ASPIRATION SPRAYER

(Title of the Invention)

the specification of which



is attached hereto

OR



was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(d) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES	Certified Copy Attached? NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number (s)	Filing Date (MM/DD/YYYY)

Additional provisional application
numbers are listed on a supplemental
priority data sheet Patent and
Trademark Office/SB/02B attached
hereto

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION - UTILITY OR DESIGN PATENT APPLICATION

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365© of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application

U.S. Patent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT International application numbers are listed on a supplemental priority data sheet Patent and Trademark Office-SB/02B attached

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

☒ Customer Number

23387

OR

☐ Registered practitioner(s) name/registration number listed below



23387

PATENT TRADEMARK OFFICE

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet Patent and Trademark Office/SB/02C attached hereto.

Direct all correspondence to:

☒ Customer Number or Bar Code Label

23387

PATENT TRADEMARK OFFICE

OR

☐ Correspondence address below

Name		Address		Address	
City	State	ZIP	City	State	ZIP
Country	Telephone	Fax	Country	Telephone	Fax

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A Petition has been filed for this unsigned inventor

Given Name (first and middle [if any])			Family Name or Surname		
Mario J.			Restive		
Inventor's Signature		Date		10-11-2000	
Residence: City	Frankfort	State	New York	Country	UNITED STATES
Post Office Address	RD 3 Gorge Rd.				
Post Office Address					
City	Frankfort	State	New York	ZIP	13340
Country	UNITED STATES				

☐ Additional inventors are being named on the

Supplemental Additional Inventor(s) sheet(s) Patent and Trademark Office/SB/02A attached hereto.